



8 in SURE LOCK LAP



SURE LOCK™ LAP SIDING

SURE LOCK SIX COTTAGE LAP

TruWood®

SIDING

TRUWOOD 8 in SURE LOCK™ AND SURE LOCK SIX COTTAGE LAP® SIDING WITH CONCEALED NAILING SYSTEM

TruWood Sure Lock™ 1/2 in Lap Siding does more than securely lock in each piece of siding. It also locks in Tru beauty. Featuring a hidden nail design that allows flexible and easy application, TruWood Sure Lock Lap Siding means no checks, cracks or surface variations and smooth, uniform paint application. It's available in Old Mill® textured surface for the look of cedar without the defects or high cost for Tru quality and Tru character that lasts.


FEATURES/BENEFITS

- Sure Lock profile assures straight, level installation
- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 16 ft lengths
- Matching reversible TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family and multi-family housing, remodeling and light commercial projects
- Ask us about our FSC® products




- Endures extreme weather conditions in the toughest climates
- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

8 in SURE LOCK
1/2 in LAP SIDING

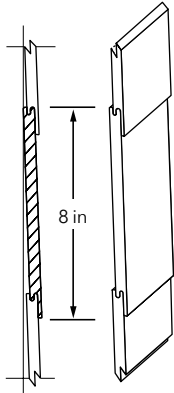

SURE LOCK SIX COTTAGE LAP
7/8 in GROOVE
1/2 in LAP SIDING

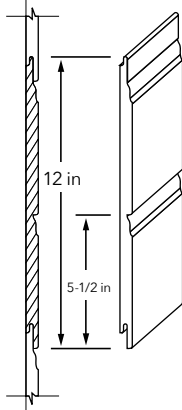

SPECIFICATIONS:

Sure Lock Six Cottage Lap® Siding

Lap Size	Pc/ Unit	Pc/ Bundle	Bundles/ Unit	Sq. Ft./ Unit	Maximum Exposure in inches	Approx. Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
1/2 in x 12 in x 16 ft	140	5	28	2,240	11	1,951	1,145	4,250

*Allows for a 1 in overlap and assumes a 5% waste factor.

Sure Lock™ Lap Siding

Lap Size	Pc/ Unit	Pc/ Bundle	Bundles/ Unit	Sq. Ft./ Unit	Maximum Exposure in inches	Approx. Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
1/2 in x 8 in x 16 ft	210	5	42	2,240	7	1,862	1,200	4,550

*Allows for a 1 in overlap and assumes a 5% waste factor.

Selection

Lap Size	Surface Texture
1/2 in x 8 in x 16 ft	Old Mill®
1/2 in x 12 in x 16 ft	Old Mill®

TruWood Siding and Trim meet the requirements of the following:

2015 International Building Code
2015 International Residential Code
ICC ESR-2588
Federal Manufactured Housing Standards
American National Standard ANSI-CPA 135.6 - 2015
California Wildland-Urban Interface (WUI)

CAL. PROP 65 WARNING: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

Fire rating = Class C, R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU
The approximate weight: 1/2 in Lap Siding = 1,900 Lbs./MSF (Cottage Six Lap®)
The approximate weight: 1/2 in Lap Siding = 1,965 Lbs./MSF (Lap Siding)
TruWood Sure Lock Sidings are shipped 10-11 units per truckload
or 40 units per railcar

FOR YOUR NEAREST DISTRIBUTOR, COMPLETE INSTALLATION INSTRUCTIONS, MAINTENANCE, SERVICE AND WARRANTY INFORMATION, GO TO TruWoodSiding.com. FOR LOCATIONS, CALL **800.417.3674** OR EMAIL truwood@collinsco.com.

