



## TruWood® SIDING

### TRUWOOD ADOBE™ PANEL SIDING

Who says you can't have it all? TruWood Adobe™ 1/2 in Panel Siding gives you Tru stucco texture, right down to the finisher's trowel marks. Engineered to be more damage-resistant than today's stucco, TruWood Adobe 1/2 in Panel Siding offers easy installation with a shi lap edge and smooth, uniform paint application without the cost of masonry or the inconvenience of a lengthy curing time. The result: Tru Tudor elegance. Tru in architectural luxury. A Truly unforgettable first impression that lasts and lasts.


#### FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 4 ft x 8 ft panels for optimal versatility
- Matching reversible TruWood Trim
- Use for residential single-family and multi-family housing, remodeling and light commercial projects
- Ask us about our FSC® products



- Endures extreme weather conditions in the toughest climates
- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

## 1/2 in ADOBE™ PANEL SIDING SHIPLAP EDGE

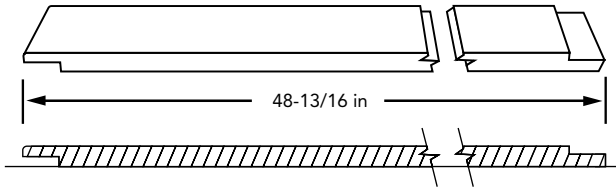

## SPECIFICATIONS:

Lap Size	Pc/ Unit	Sq. Ft./ Unit	Coverage Sq. Ft./ Unit	Approx. Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
1/2 in x 4 ft x 8 ft	37	1,184	1,066	1,100	2,400

\*Assumes a 10% waste factor for cutting and fitting.

Adobe panels are shiplapped on the long edges and cut oversize to provide 48 in net coverage when applied.

## TruWood Siding and Trim meet the requirements of the following:

2015 International Building Code  
2015 International Residential Code  
ICC ESR-2588  
Federal Manufactured Housing Standards  
American National Standard ANSI-CPA 135.6 - 2015  
California Wildland-Urban Interface (WUI)

**CAL. PROP 65 WARNING:** Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

Fire rating = Class C, R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU  
1/2 in Lap Siding = No Shear Value  
Racking, when installed in accordance with TruWood application instructions:  
1/2 in Panel Siding = 202 Shear Value  
The approximate weight: 1/2 in Panel Siding = 2,070 Lbs./MSF  
TruWood Panel Siding is shipped 20 units per truckload or 60 units per railcar

FOR YOUR NEAREST DISTRIBUTOR, COMPLETE INSTALLATION INSTRUCTIONS, MAINTENANCE, SERVICE AND WARRANTY INFORMATION, GO TO [TruWoodSiding.com](http://TruWoodSiding.com). FOR LOCATIONS, CALL **800.417.3674** OR EMAIL [truwood@collinsco.com](mailto:truwood@collinsco.com).

